



慈溪市万捷电子有限公司

地址: 中国浙江省慈溪市逍林镇樟新南路219号
邮编: 315321
电话: +86-574-63510583 63510584 63516866
传真: +86-574-63510580 63519360
网址: <http://www.china-wj.com>
邮箱: cjw@china-wj.com

CIXI WANJIE ELECTRONIC CO., LTD.

Add.: #219, Zhangxin South Rd, Xiaolin Town, Cixi,
Zhejiang, China. P.C: 315321
Tel: +86-574-63510582 63510586
Fax: +86-574-63507658 63510580
Website: <http://www.china-wj.com>
E-mail: cjw@china-wj.com



让连接更省心
Let The Connection Easily

万捷电子

WANJIE ELECTRONIC

轨道式接线端子

Din Rail Terminal Block

VERSION 2020-2021

ISO14001 ISO80079-34 IATF16949:2016 ISO9001:2008   **RoHS**



企业简介 INTRODUCTION

万捷电子 创建于1992年,公司坐落于浙江慈溪,是一家从事接线端子研发,设计,加工,生产,销售及一体化的专业制造商。产品包含螺钉式PCB接线端子,插拔式接线端子,弹簧PCB式接线端子, MCS多用途接线器,贯通式接线端子,栅栏式接线端子等系列,广泛应用于电力控制,自动化控制,电梯,仪器仪表,通讯,电源,安防,照明,轨道交通等相关领域。产品畅销于世界各地,并得到了客户的一致好评。

WANJIE was founded in 1992, we are a professional manufacturer that specializing in R&D, design, processing, production, sale and service of terminal blocks. The products include PCB screw and spring, pluggable, MCS, feed through and barrier terminal block, which are widely used in electric power control, automation control, elevator, instrumentation, communications, power supply, security, lighting, rail transportation and other related fields. The products are sold all over the world and have received the unanimous praise from customers.

检测设备 TESTING EQUIPMENT

万捷电子拥有领先的生产设备,丰富专业知识和经验的研发团队,公司本着对完美品质的不懈追求,在塑料成型,金属加工,产品装配等每个环节上严格贯彻ISO9001质量体系,并采用国际先进的检测设备对产品进行相关的性能测试,最大限度满足客户的需求。

WANJIE Company has advanced production equipment, a wealth of professional knowledge and experience to ensure the coordination between development and production. Based on the pursuit of perfect quality, we implement the ISO9001 Quality Control System in the each step, such as, the plastic housing processing, metal parts production, surface treatment, assemble and so on. On the other hand, we adopt the advance testing equipment to make systematic testing in each circle in the production, so that to meet the exacting demands of customers.

研发创新 R&D INNOVATION

万捷电子诚邀国内外行业精英,设立研发中心,建立技术创新平台。基于此研发和技术创新平台,公司对市场做出更快速的反应、集成多方资源,为国内外客户提供最直接、最优质的技术支持等服务。

万捷电子将研发与市场的需求紧密相结合,与最终用户共同合作,创造出具有国际竞争力的产品。

WANJIE Company invites many industry elites to set up R&D center, and establish the technological innovation platform, basing on the platform, we can make faster reaction on the market, and integrate all resources to provide the market, and integrate all resources to provide the most direct and best service for all of our customers.

WANJIE Company also make a closely integration between research and market, and cooperate with end customers, to create an international competitive products.

销售网络 MARKETING NETWORK


万捷电子经过多年的发展,以高质量的产品,优质的服务和强大的物流体系,获得客户的信赖,并在全球建立了全面的销售网络,以便我们能及时与客户沟通和提供服务,达到合作共赢,共同发展。

Through many years development, basing on high quality and excellent service, we have established a comprehensive sales network in the world, we also built lots of offices in many regions so that we can make a timely communication with customers, and provide a good promise and guarantee accordingly.




研发创新 R&D INNOVATION

接线端子专业制造商

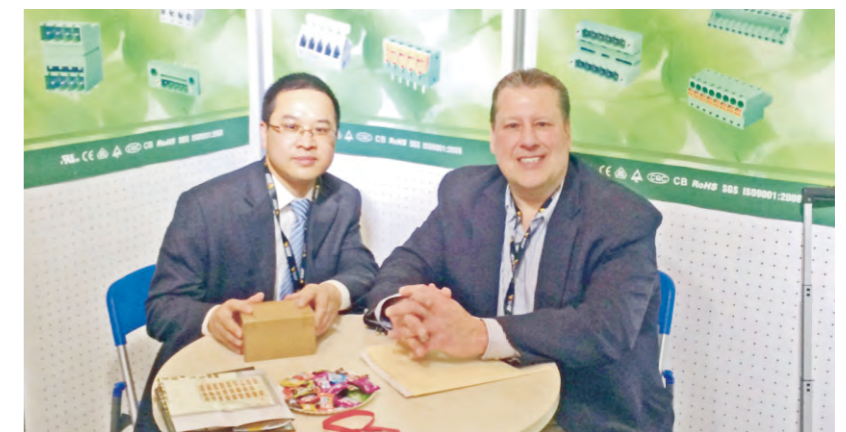


OUR ETERNAL PURPOSE:
Excellence, quality first, service-oriented,
continuous improvement and customer satisfaction

我们的宗旨:
精益求精, 质量为先, 服务第一, 持续改善, 顾客满意

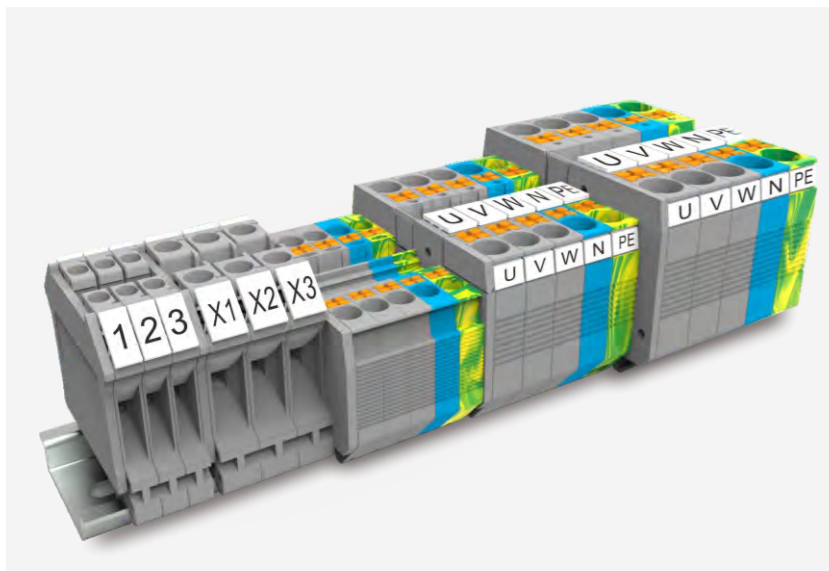

规格示意图:

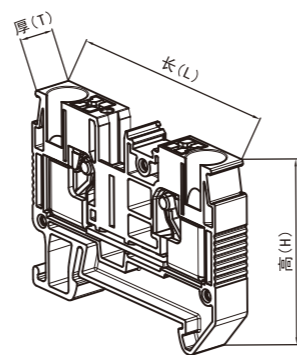


GUV直插式接线端子

GUV Push-in terminal block

材料特点:

- 绝缘外壳**——采用无卤阻燃 PA66, 具有抗冲击、抗化学腐蚀、抗老化等性能。
- 导电金属**——采用高导电性的铜材, 表面覆盖锡保护层。
- 弹簧**——采用高强度铬镍弹簧钢制造, 提供足够的压紧力。

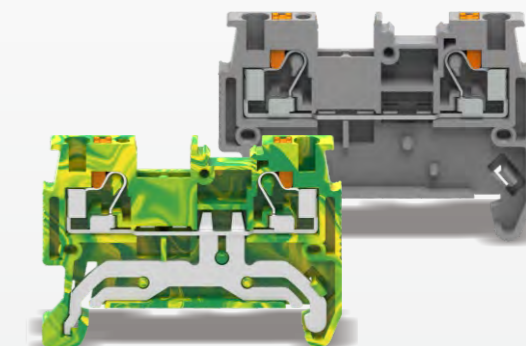

Material characteristics:



- Insulating housing** —— using halogen-free flame retardant PA66, with impact resistance, Chemical resistance, anti-aging and other properties.
- Conductive metal** —— using highly conductive copper with a surface covered with tin protective layer.
- Spring** —— made of high-strength chrome-nickel spring steel and with sufficient pressing force.

产品特点:

- 无需借助专用工具完成接线。
- 通过按钮隔绝操作工具和带电部件。
- 减少接线工时, 节省接线时间 50%。
- 双跨接位满足更多接线需求。
- 三标记位满足全方位的视觉需求, 减少接线错误。


Product Features:

- Wiring without special tools.
- Isolate operating tools and conductor by buttons.
- Reduce wiring process and save 50% wiring time.
- Double-span contacts meet more wiring requirement.
- Three marker bits meet all-round visual requirement and reduce wiring mistake.

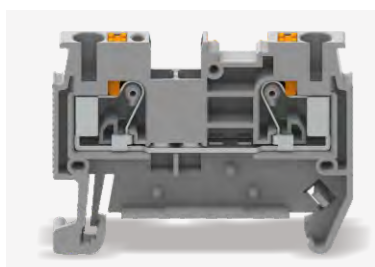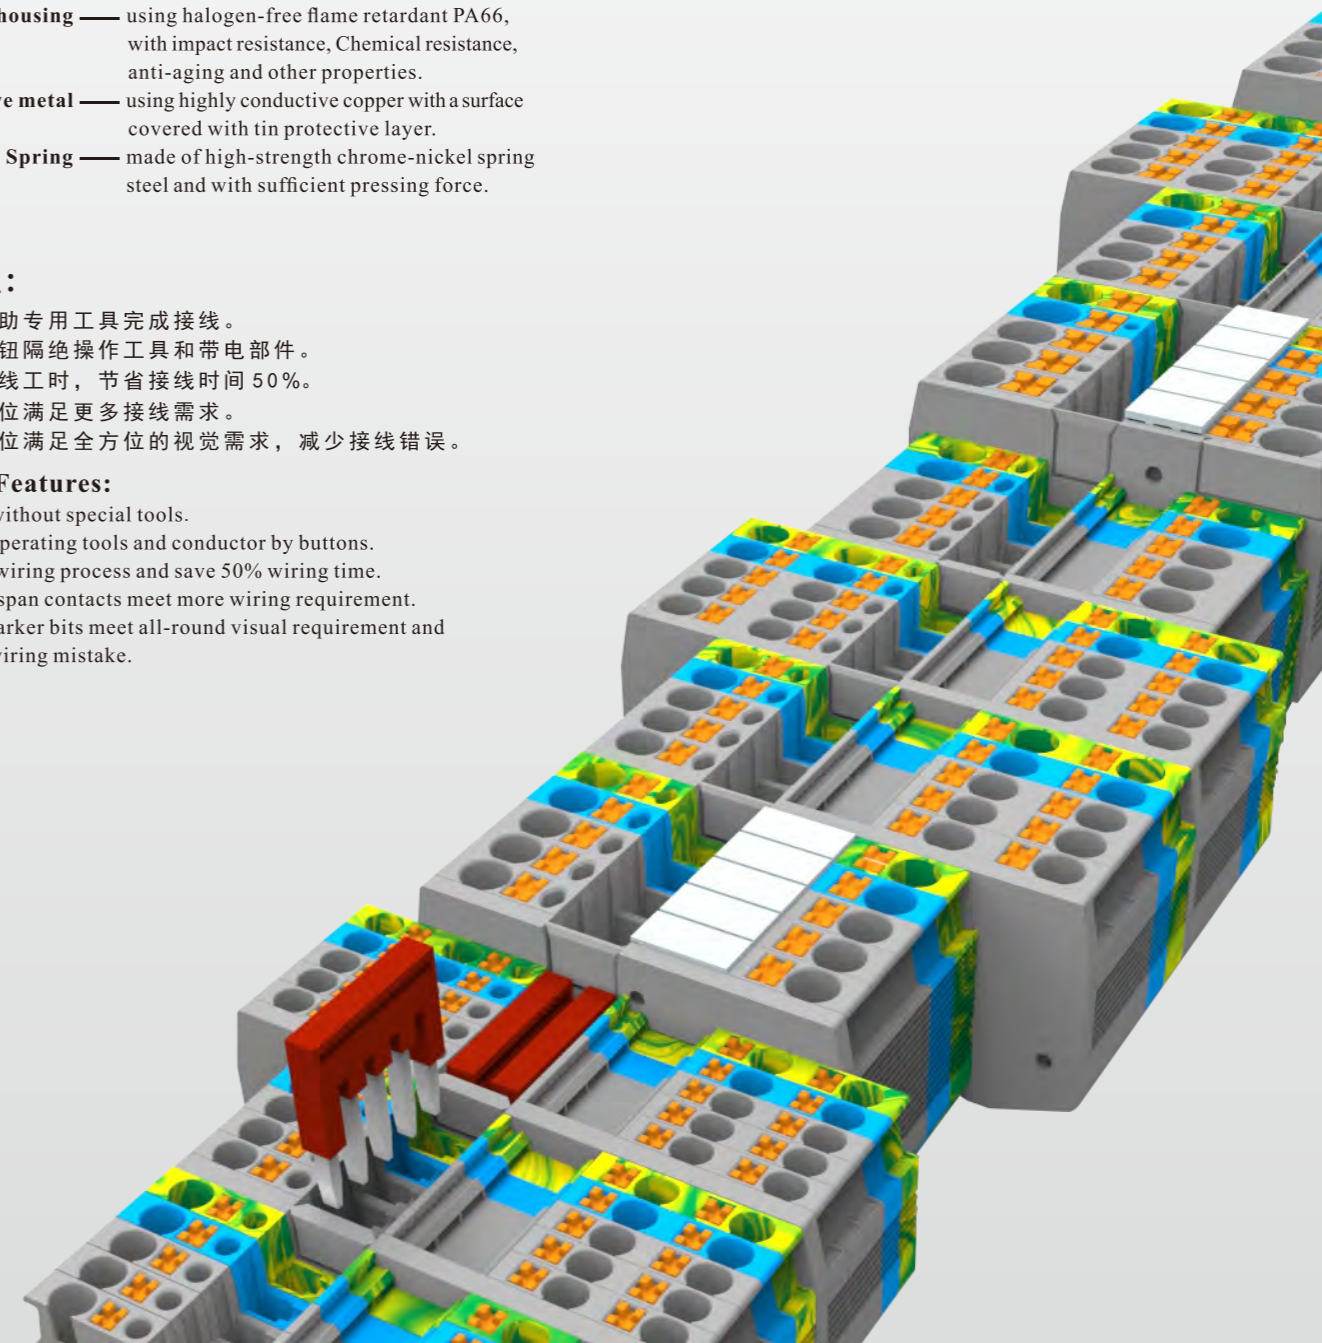


GUV直插式接线端子 GUV PUSH-IN TERMINAL BLOCK

订购方式/HOW TO ORDER:




颜色 Color		
GV 灰色 Grey	GN 绿色 Green	PE 黄绿色 Yellow Green
BU 蓝色 Blue	OG 橙色 Orange	YE 黄色 Yellow
BK 黑色 Black	RD 红色 Red	WH 白色 White

P06-26

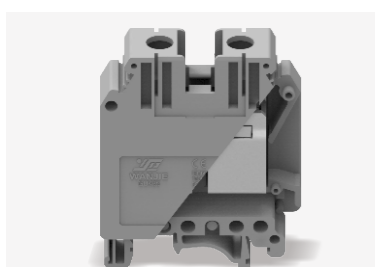


GUK通用组合接线端子 GUK UNIVERSAL COMBINATION TERMINAL BLOCK

订购方式/HOW TO ORDER:




颜色 Color		
10 灰色 Grey	40 绿色 Green	70 透明 Transp.
20 蓝色 Blue	50 橙色 Orange	80 黄色 Yellow
30 黑色 Black	60 红色 Red	90 白色 White

P27-34

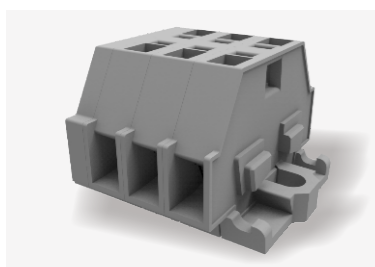

GWS笼式弹簧接线端子 GWS CAGE CLAMP TERMINAL BLOCK


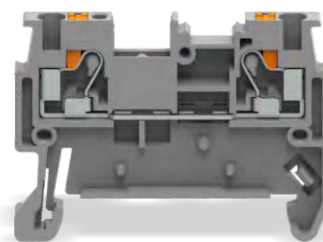
订购方式/HOW TO ORDER:




颜色 Color			
0 未定义 No definition	1A 灰色 Grey	40 绿色 Green	70 透明 Transp.
1 单倍间距 Single pitch	20 蓝色 Blue	50 橙色 Orange	80 黄色 Yellow
2 双倍间距 Double pitch	30 黑色 Black	60 红色 Red	90 白色 White



P35-39


GUV1.5-102
一进一出


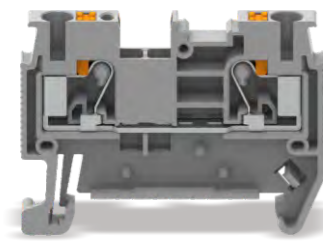
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		15	15	5
接线范围 Wire Range		26-14AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		500		
额定电流 Rated Current [A]		17.5		
单芯 Solid		0.2-1.5mm ²		
柔性导线 Flexible		0.2-1.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		45mm/30.6mm/3.5mm		
剥线长度 Stripping Length		8-10mm		
认证 Approval				


GUV6-102
一进一出


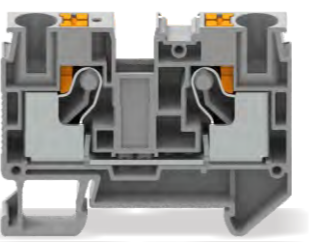
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		40	40	5
接线范围 Wire Range		20-8AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		1000		
额定电流 Rated Current [A]		41		
单芯 Solid		0.5-10.0mm ²		
柔性导线 Flexible		0.5-6.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.5-6.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		57.8mm/42.3mm/8.2mm		
剥线长度 Stripping Length		10-12mm		
认证 Approval				

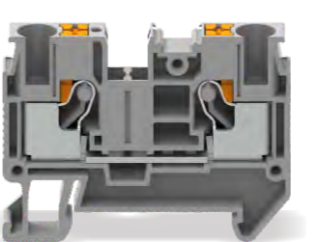
GUV2.5-102
一进一出


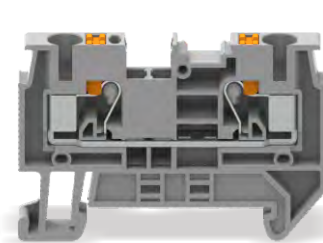
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		20	20	5
接线范围 Wire Range		26-12AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-4.0mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-2.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		48.6mm/35.2mm/5.2mm		
剥线长度 Stripping Length		8-10mm		
认证 Approval				


GUV10-102
一进一出


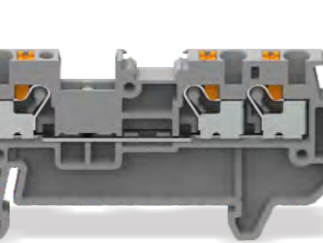
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		60	60	5
接线范围 Wire Range		20-6AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		1000		
额定电流 Rated Current [A]		57		
单芯 Solid		0.5-16.0mm ²		
柔性导线 Flexible		0.5-10.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.5-10.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		67.9mm/49.7mm/10.2mm		
剥线长度 Stripping Length		18mm		
认证 Approval				


GUV4-102
一进一出

技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		30	30	5
接线范围 Wire Range		24-10AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		32		
单芯 Solid		0.2-6.0mm ²		
柔性导线 Flexible		0.2-4.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-4.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		55.9mm/35.2mm/6.2mm		
剥线长度 Stripping Length		10-12mm		
认证 Approval				

GUV1.5-103
一进两出


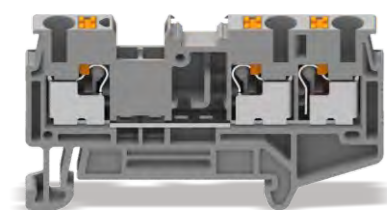



技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		15	15	5
接线范围 Wire Range		26-14AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		500		
额定电流 Rated Current [A]		17.5		
单芯 Solid		0.2-1.5mm ²		
柔性导线 Flexible		0.2-1.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		54.2mm/30.6mm/3.5mm		
剥线长度 Stripping Length		8-10mm		
认证 Approval				

GUV直插式接线端子
GUV PUSH-IN TERMINAL BLOCK


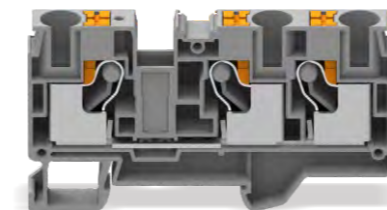
ISO14001 ISO80079-34 IATF16949:2016 ISO9001:2008   

GUV2.5-103
一进两出


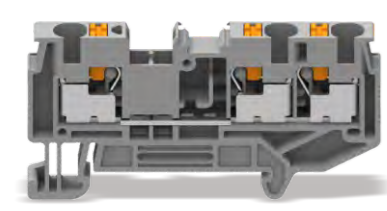
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		20	20	5
接线范围 Wire Range		26-12AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-4.0mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-2.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		60.6mm/35.3mm/5.2mm		
剥线长度 Stripping Length		8-10mm		
认证 Approval				

GUV10-103
一进两出


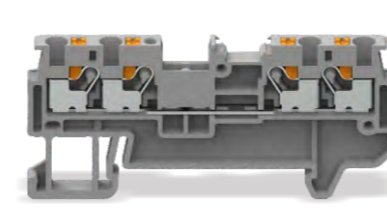
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		60	60	5
接线范围 Wire Range		20-6AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		1000		
额定电流 Rated Current [A]		57		
单芯 Solid		0.5-16.0mm ²		
柔性导线 Flexible		0.5-10.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.5-10.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		89.2mm/49.7mm/10.2mm		
剥线长度 Stripping Length		18mm		
认证 Approval				

GUV4-103
一进两出


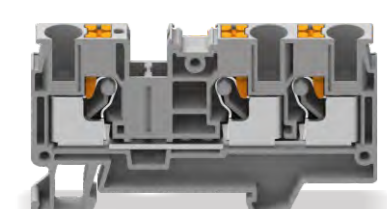
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		30	30	5
接线范围 Wire Range		24-10AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		32		
单芯 Solid		0.2-6.0mm ²		
柔性导线 Flexible		0.2-4.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-4.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		66.6mm/35.3mm/6.2mm		
剥线长度 Stripping Length		10-12mm		
认证 Approval				

GUV1.5-104
两进两出


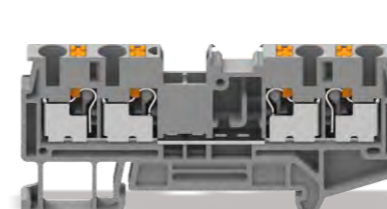
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		15	15	5
接线范围 Wire Range		26-14AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		500		
额定电流 Rated Current [A]		17.5		
单芯 Solid		0.2-1.5mm ²		
柔性导线 Flexible		0.2-1.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		63.6mm/30.6mm/3.5mm		
剥线长度 Stripping Length		8-10mm		
认证 Approval				

GUV6-103
一进两出



技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		40	40	5
接线范围 Wire Range		20-8AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		1000		
额定电流 Rated Current [A]		41		
单芯 Solid		0.5-10.0mm ²		
柔性导线 Flexible		0.5-6.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.5-6.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		74.2mm/42.3mm/8.2mm		
剥线长度 Stripping Length		10-12mm		
认证 Approval				



GUV2.5-104
两进两出


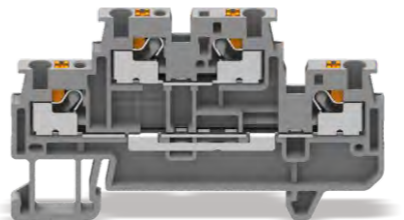
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		20	20	5
接线范围 Wire Range		26-12AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-4.0mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-2.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		72.3mm/35.3mm/5.2mm		
剥线长度 Stripping Length		8-10mm		
认证 Approval				


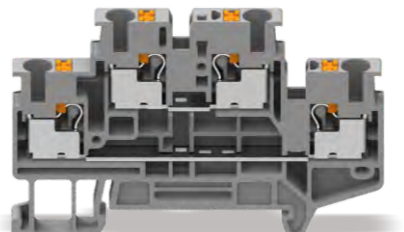
GUV直插式接线端子
GUV PUSH-IN TERMINAL BLOCK



GUV4-104 两进两出  	技术参数 Technical Data 等级 Use Group 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 接线范围 Wire Range	UL (1059) B C D 600 600 600 30 30 5 24-10AWG	
	技术参数 Technical Data 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 单芯 Solid 柔性导线 Flexible 柔性导线带冷压头 Flexible with ferrule 过电压类别 Overvoltage Category 污染等级 Degree of pollution 额定冲击电压 Impulse withstand voltage	IEC (60947-7-1) 800 32 0.2-6.0mm ² 0.2-4.0mm ² 0.2-4.0mm ² III 3 8KV	材料 Material 绝缘材料 Insulation Material 阻燃等级 Flammability rating 导体材料 Contactor Material 导体表面镀层 Contactive Coating
一般参数 Other Data 长/高/厚 Length/Height/Thickness 剥线长度 Stripping Length 认证 Approval		77.0mm/35.3mm/6.2mm 10-12mm	

GUV6-104 两进两出  	技术参数 Technical Data 等级 Use Group 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 接线范围 Wire Range	UL (1059) B C D 600 600 600 40 40 5 20-8AWG	
	技术参数 Technical Data 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 单芯 Solid 柔性导线 Flexible 柔性导线带冷压头 Flexible with ferrule 过电压类别 Overvoltage Category 污染等级 Degree of pollution 额定冲击电压 Impulse withstand voltage	IEC (60947-7-1) 1000 41 0.5-10.0mm ² 0.5-6.0mm ² 0.5-6.0mm ² III 3 8KV	材料 Material 绝缘材料 Insulation Material 阻燃等级 Flammability rating 导体材料 Contactor Material 导体表面镀层 Contactive Coating
一般参数 Other Data 长/高/厚 Length/Height/Thickness 剥线长度 Stripping Length 认证 Approval		90.6mm/42.3mm/8.2mm 10-12mm	

GUV直插式接地端子
GUV PUSH-IN TERMINAL BLOCK

GUV1.5-202 双层一进一出  	技术参数 Technical Data 等级 Use Group 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 接线范围 Wire Range	UL (1059) B C D 300 300 600 15 15 5 26-14AWG	
	技术参数 Technical Data 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 单芯 Solid 柔性导线 Flexible 柔性导线带冷压头 Flexible with ferrule 过电压类别 Overvoltage Category 污染等级 Degree of pollution 额定冲击电压 Impulse withstand voltage	IEC (60947-7-1) 500 16 0.2-1.5 0.2-1.5 0.2-1.0 III 3 6KV	材料 Material 绝缘材料 Insulation Material 阻燃等级 Flammability rating 导体材料 Contactor Material 导体表面镀层 Contactive Coating
一般参数 Other Data 长/高/厚 Length/Height/Thickness 剥线长度 Stripping Length 认证 Approval		65.6mm/41.1mm/3.5mm 8-10	

GUV2.5-202 双层一进一出  	技术参数 Technical Data 等级 Use Group 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 接线范围 Wire Range	UL (1059) B C D 300 300 600 20 20 5 26-12AWG	
	技术参数 Technical Data 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 单芯 Solid 柔性导线 Flexible 柔性导线带冷压头 Flexible with ferrule 过电压类别 Overvoltage Category 污染等级 Degree of pollution 额定冲击电压 Impulse withstand voltage	IEC (60947-7-1) 500 22 0.2-4.0 0.2-2.5 0.2-2.5 III 3 6KV	材料 Material 绝缘材料 Insulation Material 阻燃等级 Flammability rating 导体材料 Contactor Material 导体表面镀层 Contactive Coating
一般参数 Other Data 长/高/厚 Length/Height/Thickness 剥线长度 Stripping Length 认证 Approval		68.2mm/45.8mm/5.2mm 8-10	

GUV4-202 双层一进一出  	技术参数 Technical Data 等级 Use Group 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 接线范围 Wire Range	UL (1059) B C D 300 300 600 30 30 5 24-10AWG	
	技术参数 Technical Data 额定电压 Rated Voltage [V] 额定电流 Rated Current [A] 单芯 Solid 柔性导线 Flexible 柔性导线带冷压头 Flexible with ferrule 过电压类别 Overvoltage Category 污染等级 Degree of pollution 额定冲击电压 Impulse withstand voltage	IEC (60947-7-1) 500 28 0.2-4.0 0.2-4.0 0.2-4.0 III 3 6KV	材料 Material 绝缘材料 Insulation Material 阻燃等级 Flammability rating 导体材料 Contactor Material 导体表面镀层 Contactive Coating
一般参数 Other Data 长/高/厚 Length/Height/Thickness 剥线长度 Stripping Length 认证 Approval		83.6mm/45.8mm/6.2mm 10-12	

GUV直插式接线端子
GUV PUSH-IN TERMINAL BLOCK

GUV1.5-102-PE		UL (1059)		
一进一出		B	C	D
额定电压	Rated Voltage [V]	/	/	/
额定电流	Rated Current [A]	/	/	/
接线范围	Wire Range	26-14AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压	Rated Voltage [V]	/		
额定电流	Rated Current [A]	/		
单芯	Solid	0.2-1.5mm ²		
柔性导线	Flexible	0.2-1.5mm ²		
柔性导线带冷压头	Flexible with ferrule	0.2-1.0mm ²		
过电压类别	Overvoltage Category	III		
污染等级	Degree of pollution	3		
额定冲击电压	Impulse withstand voltage	6KV		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flammability rating	UL94V-0		
导体材料	Contact Material	Copper alloy		
导体表面镀层	Contactive Coating	Sn Plated		
一般参数 Other Data				
长/高/厚	Length/Height/Thickness	45mm/30.6mm/3.5mm		
剥线长度	Stripping Length	8-10mm		
认证	Approval			

GUV2.5-102-PE		UL (1059)		
一进一出		B	C	D
额定电压	Rated Voltage [V]	/	/	/
额定电流	Rated Current [A]	/	/	/
接线范围	Wire Range	26-12AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压	Rated Voltage [V]	/		
额定电流	Rated Current [A]	/		
单芯	Solid	0.2-4.0mm ²		
柔性导线	Flexible	0.2-2.5mm ²		
柔性导线带冷压头	Flexible with ferrule	0.2-2.5mm ²		
过电压类别	Overvoltage Category	III		
污染等级	Degree of pollution	3		
额定冲击电压	Impulse withstand voltage	8KV		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flammability rating	UL94V-0		
导体材料	Contact Material	Copper alloy		
导体表面镀层	Contactive Coating	Sn Plated		
一般参数 Other Data				
长/高/厚	Length/Height/Thickness	48.6mm/35.2mm/5.2mm		
剥线长度	Stripping Length	8-10mm		
认证	Approval			

GUV4-102-PE		UL (1059)		
一进一出		B	C	D
额定电压	Rated Voltage [V]	/	/	/
额定电流	Rated Current [A]	/	/	/
接线范围	Wire Range	24-10AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压	Rated Voltage [V]	/		
额定电流	Rated Current [A]	/		
单芯	Solid	0.2-6.0mm ²		
柔性导线	Flexible	0.2-4.0mm ²		
柔性导线带冷压头	Flexible with ferrule	0.2-4.0mm ²		
过电压类别	Overvoltage Category	III		
污染等级	Degree of pollution	3		
额定冲击电压	Impulse withstand voltage	8KV		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flammability rating	UL94V-0		
导体材料	Contact Material	Copper alloy		
导体表面镀层	Contactive Coating	Sn Plated		
一般参数 Other Data				
长/高/厚	Length/Height/Thickness	55.9mm/35.2mm/6.2mm		
剥线长度	Stripping Length	10-12mm		
认证	Approval			

GUV直插式接地端子
GUV PUSH-IN TERMINAL BLOCK

GUV6-102-PE		UL (1059)		
一进一出		B	C	D
额定电压	Rated Voltage [V]	/	/	/
额定电流	Rated Current [A]	/	/	/
接线范围	Wire Range	20-8AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压	Rated Voltage [V]	/		
额定电流	Rated Current [A]	/		
单芯	Solid	0.5-10.0mm ²		
柔性导线	Flexible	0.5-6.0mm ²		
柔性导线带冷压头	Flexible with ferrule	0.5-6.0mm ²		
过电压类别	Overvoltage Category	III		
污染等级	Degree of pollution	3		
额定冲击电压	Impulse withstand voltage	8KV		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flammability rating	UL94V-0		
导体材料	Contact Material	Copper alloy		
导体表面镀层	Contactive Coating	Sn Plated		
一般参数 Other Data				
长/高/厚	Length/Height/Thickness	57.8mm/42.3mm/8.2mm		
剥线长度	Stripping Length	10-12mm		
认证	Approval			

GUV10-102-PE		UL (1059)		
一进一出		B	C	D
额定电压	Rated Voltage [V]	/	/	/
额定电流	Rated Current [A]	/	/	/
接线范围	Wire Range	20-6AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压	Rated Voltage [V]	/		
额定电流	Rated Current [A]	/		
单芯	Solid	0.5-16.0mm ²		
柔性导线	Flexible	0.5-10.0mm ²		
柔性导线带冷压头	Flexible with ferrule	0.5-10.0mm ²		
过电压类别	Overvoltage Category	III		
污染等级	Degree of pollution	3		
额定冲击电压	Impulse withstand voltage	8KV		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flammability rating	UL94V-0		
导体材料	Contact Material	Copper alloy		
导体表面镀层	Contactive Coating	Sn Plated		
一般参数 Other Data				
长/高/厚	Length/Height/Thickness	67.9mm/49.7mm/10.2mm		
剥线长度	Stripping Length	18mm		
认证	Approval			



GUV1.5-103-PE		UL (1059)		
一进两出		B	C	D
额定电压	Rated Voltage [V]	/	/	/
额定电流	Rated Current [A]	/	/	/
接线范围	Wire Range	26-14AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压	Rated Voltage [V]	/		
额定电流	Rated Current [A]	/		
单芯	Solid	0.2-1.5mm ²		
柔性导线	Flexible	0.2-1.5mm ²		
柔性导线带冷压头	Flexible with ferrule	0.2-1.0mm ²		
过电压类别	Overvoltage Category	III		
污染等级	Degree of pollution	3		
额定冲击电压	Impulse withstand voltage	6KV		
材料 Material				
绝缘材料	Insulation Material	PA66		
阻燃等级	Flammability rating	UL94V-0		
导体材料	Contact Material	Copper alloy		
导体表面镀层	Contactive Coating	Sn Plated		
一般参数 Other Data				
长/高/厚	Length/Height/Thickness	54.2mm/30.6mm/3.5mm		
剥线长度	Stripping Length	8-10mm		
认证	Approval			

GUV直插式接地端子
GUV PUSH-IN TERMINAL BLOCK

ISO14001 ISO80079-34 IATF16949:2016 ISO9001:2008 RoHS



万捷电子
WANJIE WANJIE ELECTRONIC

GUV2.5-103-PE
一进两出


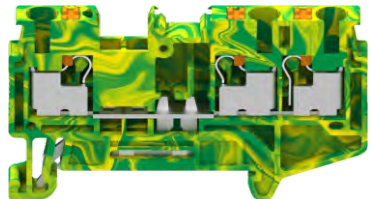
技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		26-12AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/			
额定电流 Rated Current [A]	/			
单芯 Solid		0.2-4.0mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-2.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		60.6mm/35.3mm/5.2mm		
剥线长度 Stripping Length		8-10mm		
认证 Approval				

GUV10-103-PE
一进两出



技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		20-6AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/			
额定电流 Rated Current [A]	/			
单芯 Solid		0.5-16.0mm ²		
柔性导线 Flexible		0.5-10.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.5-10.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		89.2mm/49.7mm/10.2mm		
剥线长度 Stripping Length		18mm		
认证 Approval				

GUV4-103-PE
一进两出



技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		24-10AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/			
额定电流 Rated Current [A]	/			
单芯 Solid		0.2-6.0mm ²		
柔性导线 Flexible		0.2-4.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-4.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		66.6mm/35.3mm/6.2mm		
剥线长度 Stripping Length		10-12mm		
认证 Approval				

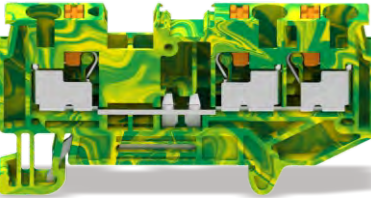GUV1.5-104-PE
两进两出



技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		26-14AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/			
额定电流 Rated Current [A]	/			
单芯 Solid		0.2-1.5mm ²		
柔性导线 Flexible		0.2-1.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		63.6mm/30.6mm/3.5mm		
剥线长度 Stripping Length		8-10mm		
认证 Approval				

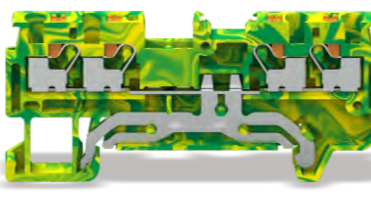GUV6-103-PE
一进两出

技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		20-8AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/			
额定电流 Rated Current [A]	/			
单芯 Solid		0.5-10.0mm ²		
柔性导线 Flexible		0.5-6.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.5-6.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		74.2mm/42.3mm/8.2mm		
剥线长度 Stripping Length		10-12mm		
认证 Approval				

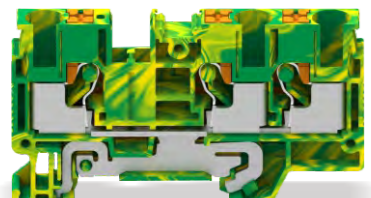GUV2.5-104-PE
两进两出






技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		26-12AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/			
额定电流 Rated Current [A]	/			
单芯 Solid		0.2-4.0mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-2.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		72.3mm/35.3mm/5.2mm		
剥线长度 Stripping Length		8-10mm		
认证 Approval				

GUV直插式接地端子
GUV PUSH-IN TERMINAL BLOCK



ISO14001 ISO80079-34 IATF16949:2016 ISO9001:2008   

GUV4-104-PE
两进两出

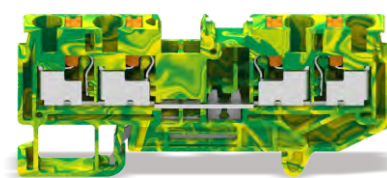

技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		24-10AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/	/		
额定电流 Rated Current [A]	/	/		
单芯 Solid		0.2-6.0mm ²		
柔性导线 Flexible		0.2-4.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-4.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		77.0mm/35.3mm/6.2mm		
剥线长度 Stripping Length		10-12mm		
认证 Approval				

GUV1.5-202-PE
双层一进一出



技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		26-14AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/	/		
额定电流 Rated Current [A]	/	/		
单芯 Solid		0.2-1.5		
柔性导线 Flexible		0.2-1.5		
柔性导线带冷压头 Flexible with ferrule		0.2-1.0		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		65.6mm/41.1mm/3.5mm		
剥线长度 Stripping Length		8-10		
认证 Approval				

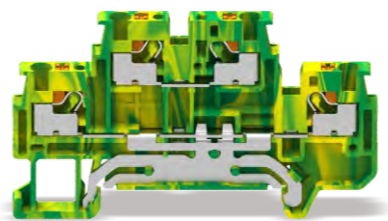GUV6-104-PE
两进两出



技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		20-8AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/	/		
额定电流 Rated Current [A]	/	/		
单芯 Solid		0.5-10.0mm ²		
柔性导线 Flexible		0.5-6.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.5-6.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		90.6mm/42.3mm/8.2mm		
剥线长度 Stripping Length		10-12mm		
认证 Approval				

GUV2.5-202-PE
双层一进一出



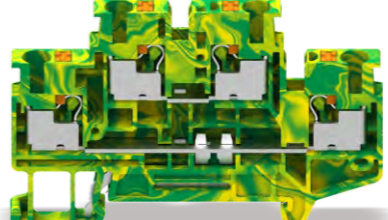





技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		26-12AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/	/		
额定电流 Rated Current [A]	/	/		
单芯 Solid		0.2-4.0		
柔性导线 Flexible		0.2-2.5		
柔性导线带冷压头 Flexible with ferrule		0.2-2.5		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		68.2mm/45.8mm/5.2mm		
剥线长度 Stripping Length		8-10		
认证 Approval				









GUV4-202-PE
双层一进一出


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	/	/	/	/
额定电流 Rated Current [A]	/	/	/	/
接线范围 Wire Range		24-10AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]	/	/		
额定电流 Rated Current [A]	/	/		
单芯 Solid		0.2-4.0		
柔性导线 Flexible		0.2-4.0		
柔性导线带冷压头 Flexible with ferrule		0.2-4.0		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		83.6mm/45.8mm/6.2mm		
剥线长度 Stripping Length		10-12		
认证 Approval				



配件 Accessories

<p>DUV1.5-102</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>45mm/24.6mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	45mm/24.6mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	45mm/24.6mm/2.2mm								
<p>DUV2.5-102</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>48.6mm/29.2mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	48.6mm/29.2mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	48.6mm/29.2mm/2.2mm								
<p>DUV4-102</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>55.9mm/29.2mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	55.9mm/29.2mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	55.9mm/29.2mm/2.2mm								
<p>DUV6-102</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>57.8mm/36.2mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	57.8mm/36.2mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	57.8mm/36.2mm/2.2mm								
<p>DUV10-102</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>67.9mm/42.7mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	67.9mm/42.7mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	67.9mm/42.7mm/2.2mm								
<p>DUV1.5-103</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>54.2mm/24.6mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	54.2mm/24.6mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	54.2mm/24.6mm/2.2mm								
<p>DUV2.5-103</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>60.6mm/29.2mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	60.6mm/29.2mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	60.6mm/29.2mm/2.2mm								
<p>DUV4-103</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>66.6mm/29.3mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	66.6mm/29.3mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	66.6mm/29.3mm/2.2mm								

<p>DUV6-103</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>74.2mm/36.2mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	74.2mm/36.2mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	74.2mm/36.2mm/2.2mm								
<p>DUV10-103</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>89.2mm/42.7mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	89.2mm/42.7mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	89.2mm/42.7mm/2.2mm								
<p>DUV1.5-104</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>63.6mm/24.6mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	63.6mm/24.6mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	63.6mm/24.6mm/2.2mm								
<p>DUV2.5-104</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>72.3mm/29.3mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	72.3mm/29.3mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	72.3mm/29.3mm/2.2mm								
<p>DUV4-104</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>77.0mm/29.3mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	77.0mm/29.3mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	77.0mm/29.3mm/2.2mm								
<p>DUV6-104</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>90.6mm/36.2mm/2.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	90.6mm/36.2mm/2.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	90.6mm/36.2mm/2.2mm								
<p>DUV1.5-202</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>65.6mm/41.1mm/3.5mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	65.6mm/41.1mm/3.5mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	65.6mm/41.1mm/3.5mm								
<p>DUV2.5-202</p> 	<table border="1"> <tr> <td>绝缘材料</td> <td>Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级</td> <td>Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚</td> <td>Length/Height/Thickness</td> <td>68.2mm/45.8mm/5.2mm</td> </tr> </table>	绝缘材料	Insulation Material	PA66	阻燃等级	Flammability rating	UL94V-0	长/高/厚	Length/Height/Thickness	68.2mm/45.8mm/5.2mm
绝缘材料	Insulation Material	PA66								
阻燃等级	Flammability rating	UL94V-0								
长/高/厚	Length/Height/Thickness	68.2mm/45.8mm/5.2mm								

配件 Accessories

DUV4-202 	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	长/高/厚 Length/Height/Thickness	83.6mm/45.8mm/6.2mm

FUVA1.5-XX 	<table border="1"> <tr><td>位数 Poles</td><td>2,3,4,5,10</td></tr> <tr><td>额定电流 Rated Current (Max)[A]</td><td>17.5</td></tr> <tr><td>绝缘材料 Insulation Material</td><td>ABS</td></tr> <tr><td>导体材料 Contactor Material</td><td>Copper alloy</td></tr> <tr><td>导体表面镀层 Contactive Coating</td><td>Sn Plated</td></tr> </table>	位数 Poles	2,3,4,5,10	额定电流 Rated Current (Max)[A]	17.5	绝缘材料 Insulation Material	ABS	导体材料 Contactor Material	Copper alloy	导体表面镀层 Contactive Coating	Sn Plated
位数 Poles	2,3,4,5,10										
额定电流 Rated Current (Max)[A]	17.5										
绝缘材料 Insulation Material	ABS										
导体材料 Contactor Material	Copper alloy										
导体表面镀层 Contactive Coating	Sn Plated										
FUVA2.5-XX 	<table border="1"> <tr><td>位数 Poles</td><td>2,3,4,5,10</td></tr> <tr><td>额定电流 Rated Current (Max)[A]</td><td>24</td></tr> <tr><td>绝缘材料 Insulation Material</td><td>ABS</td></tr> <tr><td>导体材料 Contactor Material</td><td>Copper alloy</td></tr> <tr><td>导体表面镀层 Contactive Coating</td><td>Sn Plated</td></tr> </table>	位数 Poles	2,3,4,5,10	额定电流 Rated Current (Max)[A]	24	绝缘材料 Insulation Material	ABS	导体材料 Contactor Material	Copper alloy	导体表面镀层 Contactive Coating	Sn Plated
位数 Poles	2,3,4,5,10										
额定电流 Rated Current (Max)[A]	24										
绝缘材料 Insulation Material	ABS										
导体材料 Contactor Material	Copper alloy										
导体表面镀层 Contactive Coating	Sn Plated										
FUVA4-XX 	<table border="1"> <tr><td>位数 Poles</td><td>2,3,4,5,10</td></tr> <tr><td>额定电流 Rated Current (Max)[A]</td><td>32</td></tr> <tr><td>绝缘材料 Insulation Material</td><td>ABS</td></tr> <tr><td>导体材料 Contactor Material</td><td>Copper alloy</td></tr> <tr><td>导体表面镀层 Contactive Coating</td><td>Sn Plated</td></tr> </table>	位数 Poles	2,3,4,5,10	额定电流 Rated Current (Max)[A]	32	绝缘材料 Insulation Material	ABS	导体材料 Contactor Material	Copper alloy	导体表面镀层 Contactive Coating	Sn Plated
位数 Poles	2,3,4,5,10										
额定电流 Rated Current (Max)[A]	32										
绝缘材料 Insulation Material	ABS										
导体材料 Contactor Material	Copper alloy										
导体表面镀层 Contactive Coating	Sn Plated										
FUVA6-XX 	<table border="1"> <tr><td>位数 Poles</td><td>2,3,4,5,10</td></tr> <tr><td>额定电流 Rated Current (Max)[A]</td><td>41</td></tr> <tr><td>绝缘材料 Insulation Material</td><td>ABS</td></tr> <tr><td>导体材料 Contactor Material</td><td>Copper alloy</td></tr> <tr><td>导体表面镀层 Contactive Coating</td><td>Sn Plated</td></tr> </table>	位数 Poles	2,3,4,5,10	额定电流 Rated Current (Max)[A]	41	绝缘材料 Insulation Material	ABS	导体材料 Contactor Material	Copper alloy	导体表面镀层 Contactive Coating	Sn Plated
位数 Poles	2,3,4,5,10										
额定电流 Rated Current (Max)[A]	41										
绝缘材料 Insulation Material	ABS										
导体材料 Contactor Material	Copper alloy										
导体表面镀层 Contactive Coating	Sn Plated										
FUVA10-XX 	<table border="1"> <tr><td>位数 Poles</td><td>2</td></tr> <tr><td>额定电流 Rated Current (Max)[A]</td><td>50</td></tr> <tr><td>绝缘材料 Insulation Material</td><td>ABS</td></tr> <tr><td>导体材料 Contactor Material</td><td>Copper alloy</td></tr> <tr><td>导体表面镀层 Contactive Coating</td><td>Sn Plated</td></tr> </table>	位数 Poles	2	额定电流 Rated Current (Max)[A]	50	绝缘材料 Insulation Material	ABS	导体材料 Contactor Material	Copper alloy	导体表面镀层 Contactive Coating	Sn Plated
位数 Poles	2										
额定电流 Rated Current (Max)[A]	50										
绝缘材料 Insulation Material	ABS										
导体材料 Contactor Material	Copper alloy										
导体表面镀层 Contactive Coating	Sn Plated										






桥接件 Bridge

- 电位桥接件用于端子与端子之间的连接,可实现相邻或间隔跨接。
- 可在安装完成后,通过不同桥接孔实现双跨接。
- The potential bridge is used to connect the upper and lower wiring layers of the double layer terminal block.
- The upper and lower wiring layers can be connected by the bridge after the installation.




- 根据接线方式可提供不同位数的桥接件。
- 从标准桥接件上剪断单个金属脚以实现间隔产品之间的跨接。
- 桥接件顶部有凹槽可实现标记功能。
- Different number of bridges are available depending on the wiring method.
- Cut a single metal foot from a standard bridge to achieve a jump connection between compartments.
- There is groove on the top of the bridge for marking.

配件 Accessories

	位数 Poles	10
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	位数 Poles	10
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	位数 Poles	10
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	位数 Poles	10
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	位数 Poles	10
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0


正面标记区






- 可直接安装在端子上并确保可靠和快速的安装。
- 标记牌位置固定可靠不易松脱。
- 端子的标记区足够大。
- 每个标记位都可单独标记。

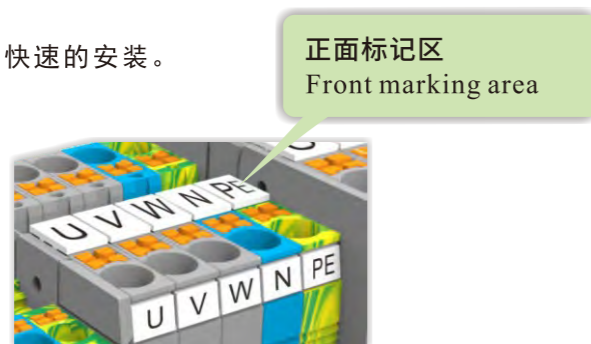

Front marking area

- To be mounted directly on the terminal block and ensure reliable and fast installation.
- The position of the signage is fixed and reliable.
- The marking area of terminal block is large enough.
- Each mark position can be individually marked.

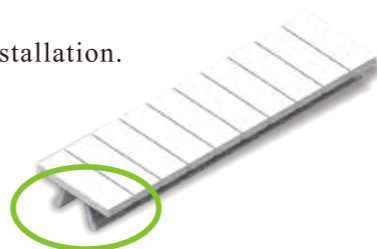

	位数 Poles	144
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	长/高/厚 Length/Height/Thickness	120/75.4/2
	位数 Poles	96
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	长/高/厚 Length/Height/Thickness	120/75.4/2
	位数 Poles	80
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	长/高/厚 Length/Height/Thickness	120/75.4/2
	位数 Poles	56
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	长/高/厚 Length/Height/Thickness	120/75.4/2
	位数 Poles	48
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	长/高/厚 Length/Height/Thickness	120/75.4/2


侧面标记区

- 保持组件侧面的平整性。
- 标记牌位置固定可靠不易松脱。
- 在狭小空间内提供侧向标识需求。
- 可配合正面标记区使用。



Side marking area

- Maintain the side flatness of the assembly.
- The position of the mark is fixed and reliable.
- Offer side marking within tight spaces.
- Can be used with the front marking area.

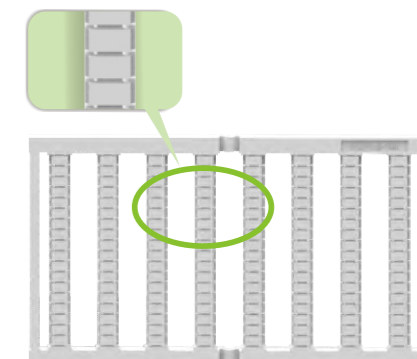

配件 Accessories


EB-35 	螺丝/扭矩 Screw/Torque(Max) [N·m]	M3/0.8
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	长/高/厚 Length/Height/Thickness	50.5/35.3/9.5
EW-35 	螺丝/扭矩 Screw/Torque(Max) [N·m]	M3/0.8
	绝缘材料 Insulation Material	PA66
	阻燃等级 Flammability rating	UL94V-0
	长/高/厚 Length/Height/Thickness	46.4/31.0/7.5
DGS1-35×7.5Z-XXX 	长度 Length (可定制)	/
	高度 Height	7.5
	宽度 Width	35
	孔径 Diameter	6.2*15mm
	材料 Material	Steel
	表面镀层 Contactive Coating	Zn Plated
DGS1-35×7.5W-XXX 	长度 Length (可定制)	/
	高度 Height	7.5
	宽度 Width	35
	孔径 Diameter	6.2*15mm
	材料 Material	Steel
	表面镀层 Contactive Coating	Zn Plated

DIN 导轨

- DIN 导轨的设计符合欧洲 EN60715 标准。
- 所有的 DIN 导轨都可以按需求长度供货。

Din rail

- The din rail is designed in accordance with EN60715 standard.
- All din rails are available in length as required.

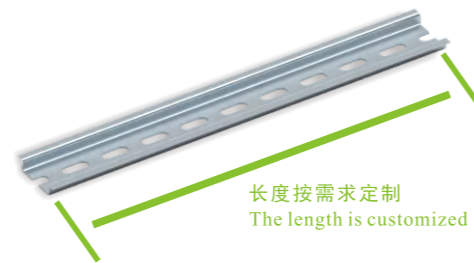

GUV 附件选配表

盖板 (单层)	GUV1.5系列	GUV2.5系列	GUV4系列	GUV6系列	GUV10系列
	DUV1.5-102	DUV2.5-102	DUV4-102	DUV6-102	DUV10-102
	DUV1.5-103	DUV2.5-103	DUV4-103	DUV6-103	DUV10-103
	DUV1.5-104	DUV2.5-104	DUV4-104	DUV6-104	
盖板 (双层)	GUV1.5系列	GUV2.5系列	GUV4系列		
	DUV1.5-202	DUV2.5-202	DUV4-202		
插拔式桥接件	GUV1.5系列	GUV2.5系列	GUV4系列	GUV6系列	GUV10系列
	FUVA1.5-2	FUVA2.5-2	FUVA4-2	FUVA6-2	FUV10-2
	FUVA1.5-3	FUVA2.5-3	FUVA4-3	FUVA6-3	
	FUVA1.5-4	FUVA2.5-4	FUVA4-4	FUVA6-4	
	FUVA1.5-5	FUVA2.5-5	FUVA4-5	FUVA6-5	
	FUVA1.5-10	FUVA2.5-10	FUVA4-10	FUVA6-10	
高位标记条 (空白)	GUV1.5系列	GUV2.5系列	GUV4系列	GUV6系列	GUV10系列
	MUV1.5-10	MUV2.5-10	MUV4-10	MUV6-10	MUV10-10
低位标记条 (空白)	GUV1.5系列	GUV2.5系列	GUV4系列	GUV6系列	GUV10系列
	PUV1.5-144	PUV2.5-96	PUV4-80	PUV6-56	PUV10-48


GUK通用组合接线端子

GUK Universal Combination Terminal Block

通用型接线端子

通用型接线端子适用于一般电气线路的连接，连接的导线横截面(1.5-35mm²)可根据所需选择端子，以便于节省空间及使用成本。端子使用的通用支架可另接到DIN导轨NS35和NS32上面，连接器中央或接线位内的桥接件进行等电位分配，且标识清晰可见。


Universal terminal block is suitable for general electrical circuit connection, the terminal can be selected according to the cross-section of the wire (1.5-35mm²) so that to save the space and cost. The terminal bracket can be installed to the din rail of NS35 or NS32. The bridges in the center of the connector or in the terminals make equal potential distribution and the marking is visible clearly.



双层型接线端子

双层型接线端子减少了控制区内的所需的空间，即使采用预组装的端子条，下层接线也很容易操作，且标识清晰可见。每层均集成有桥接件、标识和接线容量(0.2-10mm²)。


Double layer terminal block reduce the space of control zone, the lower wiring also easy to operate and the marking is visible clearly even if with pre-assembled terminal strips, each layer is integrated with bridge and mark, wiring section (0.2-10mm²).




两进两出型接线端子

两进两出型接线端子是为了将两根或更多的导线接到一个组合端子上以解决线路中的电位分配问题。尤其是当所接导线的类型和截面尺寸差别很大时更为适用。

Double input and out terminal block is used to connect two or more wires to be a combined terminal so that solve the potential distribution issue, especially when the wire type and cross-section are very different.

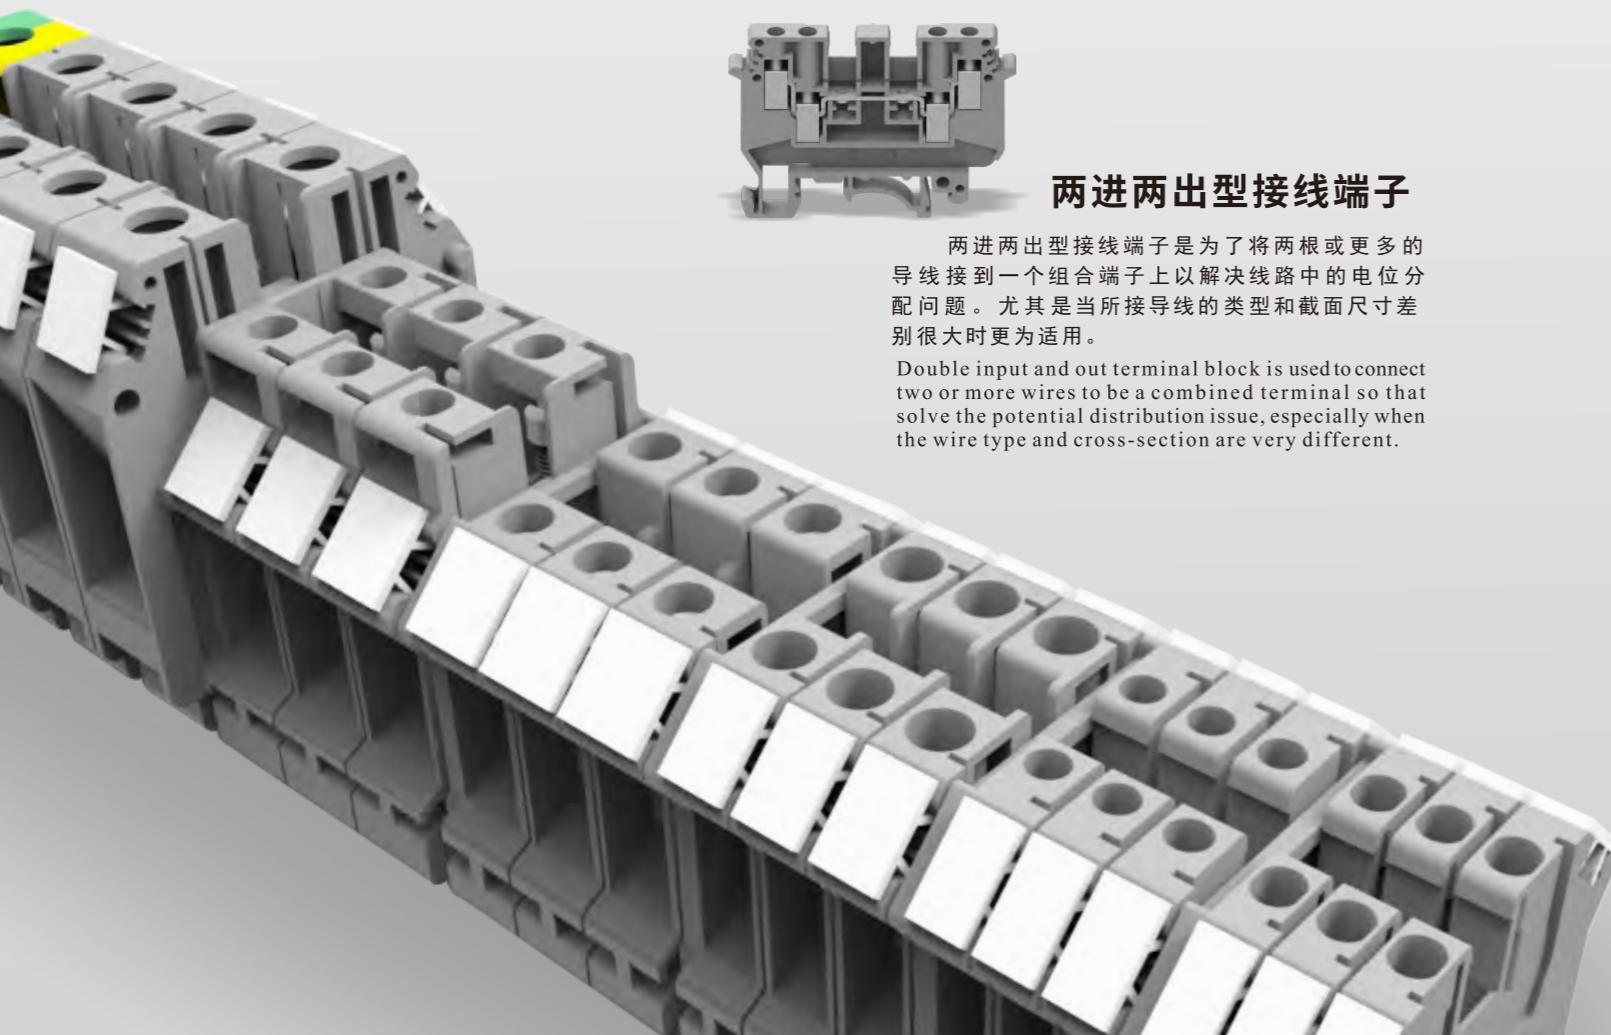


GUK1.5N
一进一出

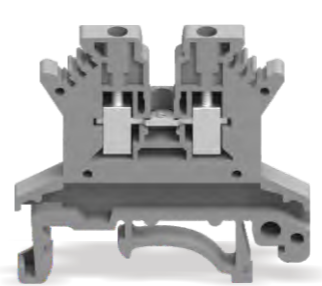


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	300	300	300	300
额定电流 Rated Current [A]	10	10	10	5
接线范围 Wire Range		26-16AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		500		
额定电流 Rated Current [A]		17.5		
单芯 Solid		0.14-1.5mm ²		
柔性导线 Flexible		0.14-1.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.25-0.75mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		42.5mm/40.6mm/4.2mm		
剥线长度 Stripping Length		7-8mm		
螺丝/扭矩 Screw/Torque [N.m]		M2/0.22-0.25		

GUK2.5B
一进一出

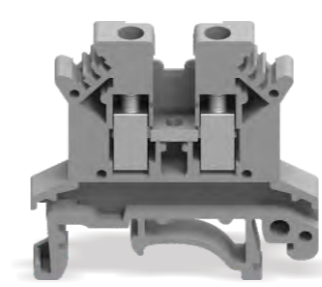


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	600	600	600	600
额定电流 Rated Current [A]	20	20	20	5
接线范围 Wire Range		24-12AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-4.0mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.25-1mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		42.5mm/40.6mm/6.2mm		
剥线长度 Stripping Length		7-8mm		
螺丝/扭矩 Screw/Torque [N.m]		M3/0.6-0.8		

GUK3N
一进一出

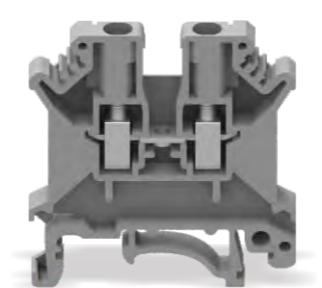


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	600	600	600	600
额定电流 Rated Current [A]	20	20	20	5
接线范围 Wire Range		24-12AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-4.0mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.25-1.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		42.5mm/45.8mm/5.2mm		
剥线长度 Stripping Length		8-9mm		
螺丝/扭矩 Screw/Torque [N.m]		M3/0.6-0.8		

GUK5N
一进一出

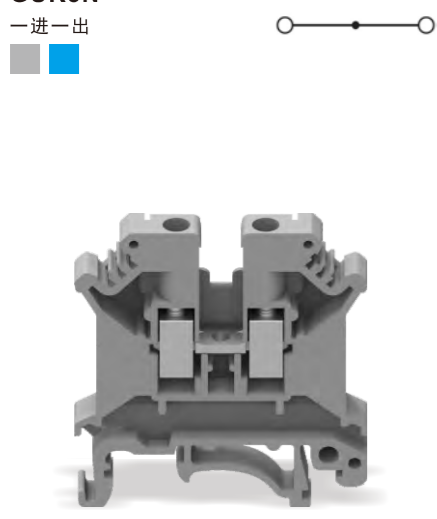


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		30	30	5
接线范围 Wire Range		24-10AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		32		
单芯 Solid		0.2-6.0mm ²		
柔性导线 Flexible		0.2-4.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.25-2.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		42.5mm/45.8mm/6.2mm		
剥线长度 Stripping Length		8-9mm		
螺丝/扭矩 Screw/Torque [N.m]		M3/0.6-0.8		

GUK16N
一进一出




技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		85	85	5
接线范围 Wire Range		22-4AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		76		
单芯 Solid		2.5-25.0mm ²		
柔性导线 Flexible		4.0-16.0mm ²		
柔性导线带冷压头 Flexible with ferrule		1.5-16.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		42.5mm/52.8mm/12.2mm		
剥线长度 Stripping Length		11-12mm		
螺丝/扭矩 Screw/Torque [N.m]		M4/1.5-1.8		

GUK6N
一进一出

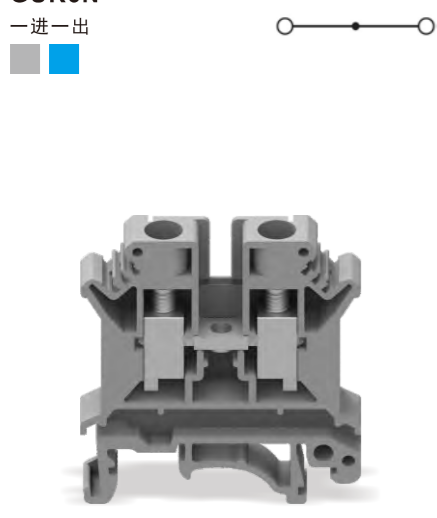


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		50	50	5
接线范围 Wire Range		24-8AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		41		
单芯 Solid		0.2-10.0mm ²		
柔性导线 Flexible		0.2-6.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.25-6.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		42.5mm/45.8mm/8.2mm		
剥线长度 Stripping Length		10-11mm		
螺丝/扭矩 Screw/Torque [N.m]		M4/1.5-1.8		

GUK35
一进一出

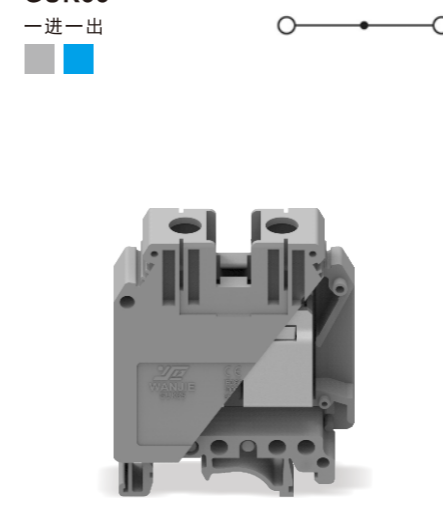


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		150	150	5
接线范围 Wire Range		18-1/0AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		1000		
额定电流 Rated Current [A]		125		
单芯 Solid		10.0-35.0mm ²		
柔性导线 Flexible		10.0-35.0mm ²		
柔性导线带冷压头 Flexible with ferrule		10.0-35.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		50mm/62mm/15.2mm		
剥线长度 Stripping Length		16-17mm		
螺丝/扭矩 Screw/Torque [N.m]		M6/3.2-3.7		

GUK10N
一进一出

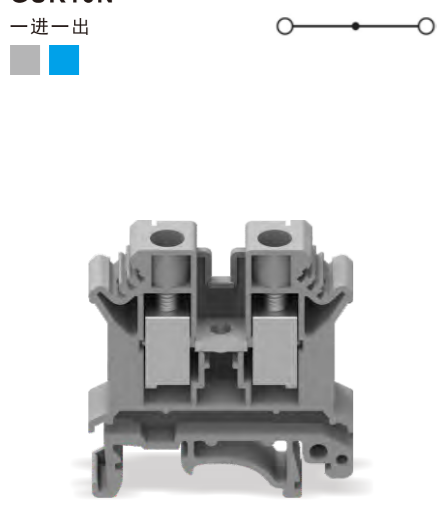


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		600	600	600
额定电流 Rated Current [A]		65	65	5
接线范围 Wire Range		20-6AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		800		
额定电流 Rated Current [A]		57		
单芯 Solid		0.5-16.0mm ²		
柔性导线 Flexible		0.5-10.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.5-6.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		42.5mm/45.8mm/10.2mm		
剥线长度 Stripping Length		10-11mm		
螺丝/扭矩 Screw/Torque [N.m]		M4/1.5-1.8		

GUDK4
两进两出

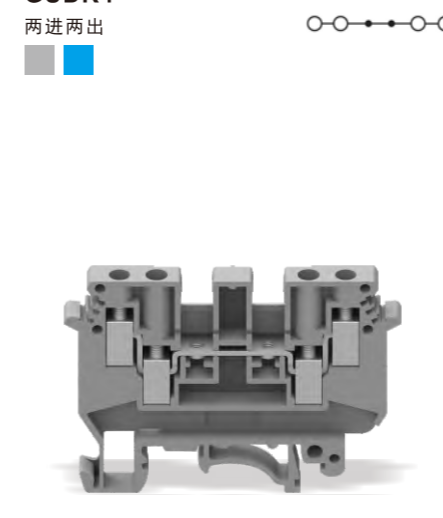


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		30	30	5
接线范围 Wire Range		24-10AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		630		
额定电流 Rated Current [A]		32		
单芯 Solid		0.2-6.0mm ²		
柔性导线 Flexible		0.2-4.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.25-1.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		63.6mm/45.90mm/6.2mm		
剥线长度 Stripping Length		8-9mm		
螺丝/扭矩 Screw/Torque [N.m]		M3/0.6-0.8		

GUKK3
双层一进一出

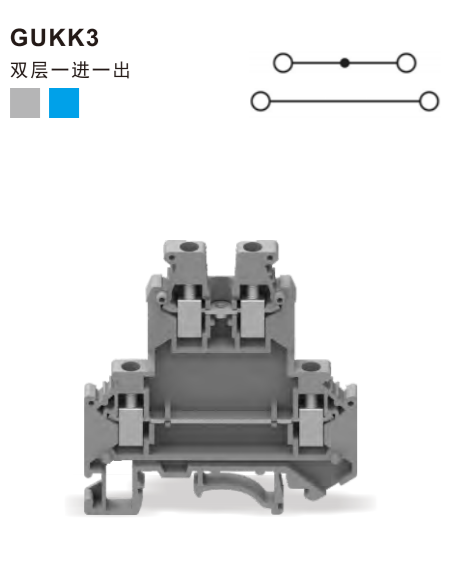

技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	300
额定电流 Rated Current [A]		20	20	5
接线范围 Wire Range		24-12AWG		
技术参数 Technical Data		IEC (60947-7-1)		
额定电压 Rated Voltage [V]		500		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-4.0mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.25-1.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		56.1mm/60.9mm/5.2mm		
剥线长度 Stripping Length		8-9mm		
螺丝/扭矩 Screw/Torque [N.m]		M3/0.6-0.8		

GUSLKG35
一进一出

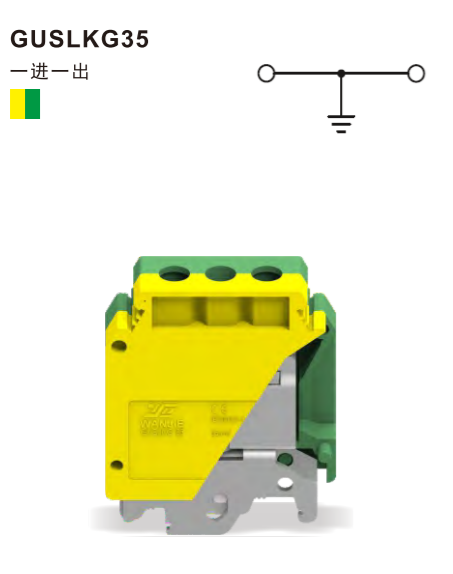


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		/	/	/
额定电流 Rated Current [A]		/	/	/
接线范围 Wire Range		18-2AWG		
技术参数 Technical Data		IEC (60947-7-2)		
额定电压 Rated Voltage [V]		/		
额定电流 Rated Current [A]		/		
单芯 Solid		10.0-35.0mm ²		
柔性导线 Flexible		10.0-35.0mm ²		
柔性导线带冷压头 Flexible with ferrule		10.0-35.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		/		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Ni Plated		
一般参数 Other Data				
长/高/厚 Length/Height/Thickness		50mm/61.8mm/15.2mm		
剥线长度 Stripping Length		16-17mm		
螺丝/扭矩 Screw/Torque [N.m]		M6/3.2-3.7		

配件 Accessories







<p>D-GUK3/10</p> 	<table border="1"> <tbody> <tr> <td>绝缘材料 Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级 Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚 Length/Height/Thickness</td> <td>42.4mm/36.1mm/1.8mm</td> </tr> </tbody> </table>	绝缘材料 Insulation Material	PA66	阻燃等级 Flammability rating	UL94V-0	长/高/厚 Length/Height/Thickness	42.4mm/36.1mm/1.8mm
绝缘材料 Insulation Material	PA66						
阻燃等级 Flammability rating	UL94V-0						
长/高/厚 Length/Height/Thickness	42.4mm/36.1mm/1.8mm						
<p>D-GUK16</p> 	<table border="1"> <tbody> <tr> <td>绝缘材料 Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级 Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚 Length/Height/Thickness</td> <td>42.5mm/42.45mm/1.5mm</td> </tr> </tbody> </table>	绝缘材料 Insulation Material	PA66	阻燃等级 Flammability rating	UL94V-0	长/高/厚 Length/Height/Thickness	42.5mm/42.45mm/1.5mm
绝缘材料 Insulation Material	PA66						
阻燃等级 Flammability rating	UL94V-0						
长/高/厚 Length/Height/Thickness	42.5mm/42.45mm/1.5mm						
<p>D-GUKK3/5</p> 	<table border="1"> <tbody> <tr> <td>绝缘材料 Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级 Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚 Length/Height/Thickness</td> <td>56.1mm/52.2mm/2.5mm</td> </tr> </tbody> </table>	绝缘材料 Insulation Material	PA66	阻燃等级 Flammability rating	UL94V-0	长/高/厚 Length/Height/Thickness	56.1mm/52.2mm/2.5mm
绝缘材料 Insulation Material	PA66						
阻燃等级 Flammability rating	UL94V-0						
长/高/厚 Length/Height/Thickness	56.1mm/52.2mm/2.5mm						
<p>D-GUDK4</p> 	<table border="1"> <tbody> <tr> <td>绝缘材料 Insulation Material</td> <td>PA66</td> </tr> <tr> <td>阻燃等级 Flammability rating</td> <td>UL94V-0</td> </tr> <tr> <td>长/高/厚 Length/Height/Thickness</td> <td>63.6mm/34.4mm/2mm</td> </tr> </tbody> </table>	绝缘材料 Insulation Material	PA66	阻燃等级 Flammability rating	UL94V-0	长/高/厚 Length/Height/Thickness	63.6mm/34.4mm/2mm
绝缘材料 Insulation Material	PA66						
阻燃等级 Flammability rating	UL94V-0						
长/高/厚 Length/Height/Thickness	63.6mm/34.4mm/2mm						

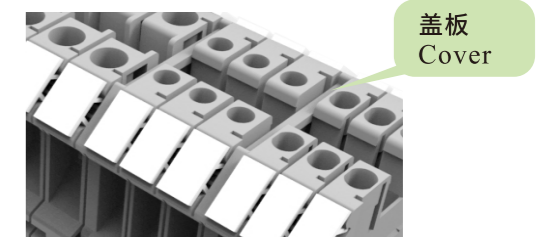盖板 Cover

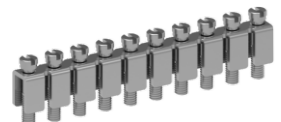


- 在相邻产品之间实现视觉上和电气上的隔离。
- 外形与端子保持一致。
- Visually and electrically isolated between adjacent products.
- The shape is consistent with the terminal block.

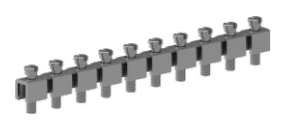

配件 Accessories

FUKB4-XX 	位数 Poles	2-10
	额定电流 Rated Current [A]	32
	螺丝/扭矩 Screw/Torque [N.m]	M3/0.6-0.8
	导体材料 Contactor Material	Copper alloy
	导体表面镀层 Contactive Coating	Ni Plated
FUKB6-XX 	位数 Poles	2-10
	额定电流 Rated Current [A]	41
	螺丝/扭矩 Screw/Torque [N.m]	M4/1.5-1.8
	导体材料 Contactor Material	Copper alloy
	导体表面镀层 Contactive Coating	Ni Plated
FUKB10-XX 	位数 Poles	2-10
	额定电流 Rated Current [A]	57
	螺丝/扭矩 Screw/Torque [N.m]	M4/1.5-1.8
	导体材料 Contactor Material	Copper alloy
	导体表面镀层 Contactive Coating	Ni Plated
FUKB16-XX 	位数 Poles	2-10
	额定电流 Rated Current [A]	76
	螺丝/扭矩 Screw/Torque [N.m]	M4/1.5-1.8
	导体材料 Contactor Material	Copper alloy
	导体表面镀层 Contactive Coating	Ni Plated
FUKB35-XX 	位数 Poles	2-10
	额定电流 Rated Current [A]	125
	螺丝/扭矩 Screw/Torque [N.m]	M6/3.2-3.7
	导体材料 Contactor Material	Copper alloy
	导体表面镀层 Contactive Coating	Ni Plated
FUKC2.5-XX 	位数 Poles	2-10
	额定电流 Rated Current [A]	24
	螺丝/扭矩 Screw/Torque [N.m]	M3/0.6-0.8
	导体材料 Contactor Material	Copper alloy
	导体表面镀层 Contactive Coating	Ni Plated

GUK附件选配表

盖板	GUK3N	GUK5N	GUK6N	GUK10N	GUK16N	
	D-GUK3/10	D-GUK3/10	D-GUK3/10	D-GUK3/10	D-GUK16	
	GUKK3	GUDK4				
	D-GUKK3/5	D-GUDK4				
插拔式桥接件	GUK3N	GUK5N	GUK6N	GUK10N	GUK16N	
	FUKC2.5-2	FUKB4-2	FUKB6-2	FUKB10-2	FUKB16-2	
	FUKC2.5-3	FUKB4-3	FUKB6-3	FUKB10-3	FUKB16-3	
	FUKC2.5-4	FUKB4-4	FUKB6-4	FUKB10-4	FUKB16-4	
	FUKC2.5-5	FUKB4-5	FUKB6-5	FUKB10-5	FUKB16-5	
	FUKC2.5-6	FUKB4-6	FUKB6-6	FUKB10-6	FUKB16-6	
	FUKC2.5-7	FUKB4-7	FUKB6-7	FUKB10-7	FUKB16-7	
	FUKC2.5-8	FUKB4-8	FUKB6-8	FUKB10-8	FUKB16-8	
	FUKC2.5-9	FUKB4-9	FUKB6-9	FUKB10-9	FUKB16-9	
	FUKC2.5-10	FUKB4-10	FUKB6-10	FUKB10-10	FUKB16-10	
		GUK35N	GUDK4			
		FUKB35-2	FUKB4-2			
		FUKB35-3	FUKB4-3			
		FUKB35-4	FUKB4-4			
		FUKB35-5	FUKB4-5			
		FUKB35-6	FUKB4-6			
	FUKB35-7	FUKB4-7				
	FUKB35-8	FUKB4-8				
	FUKB35-9	FUKB4-9				
	FUKB35-10	FUKB4-10				
高位标记条 (空白)	GUK3N	GUK5N	GUK6N	GUK10N	GUK16N	
	MUV2.5-10	MUV4-10	MUV6-10	MUV10-10	MUV10-10	
		GUK35N	GUSLKG35	GUKK3	GUDK4	
	MUV10-10	MUV10-10	MUV2.5-10	MUV4-10		

固定式桥接件 Fixed bridge

- 根据接线方式可自由裁切成2-10位产品以满足多种桥接需求。
- It can be freely cut from 2 to 10 poles so that meet various bridging requirement according to the wiring method.

固定式桥接件
Fixed bridge




GWS笼式弹簧接线端子

GWS Cage Clamp Terminal Block


产品特点:

- 采用笼式弹簧接线技术，产品精巧，拼装灵活。
- 能够满足客户更加苛刻的使用空间要求。
- 提供了螺钉固定、销钉固定、小轨道卡接固定、大轨道卡接固定和组合固定等多种固定方式。
- 便于客户将产品固定在各式各样的使用空间中。
- 产品设计制造符合IEC60947、UL1059等国际标准。
- 通过UL、RoHS等认证。




Product Features:


- Miniature spring terminal blocks use cage spring connection technology.
- The product is compact and can be flexible assembled.
- Can meet customer requirement for the use space, fixing ways can be with Screws, with snap-in mounting feet ,on small Din rail ,on big Din rail or certain combination ways.
- Product design and manufacturing is in line with the international and manufacturing is in line with the international standard IEC60947、UL1059 and have the certificates UL、RoHS ETC.

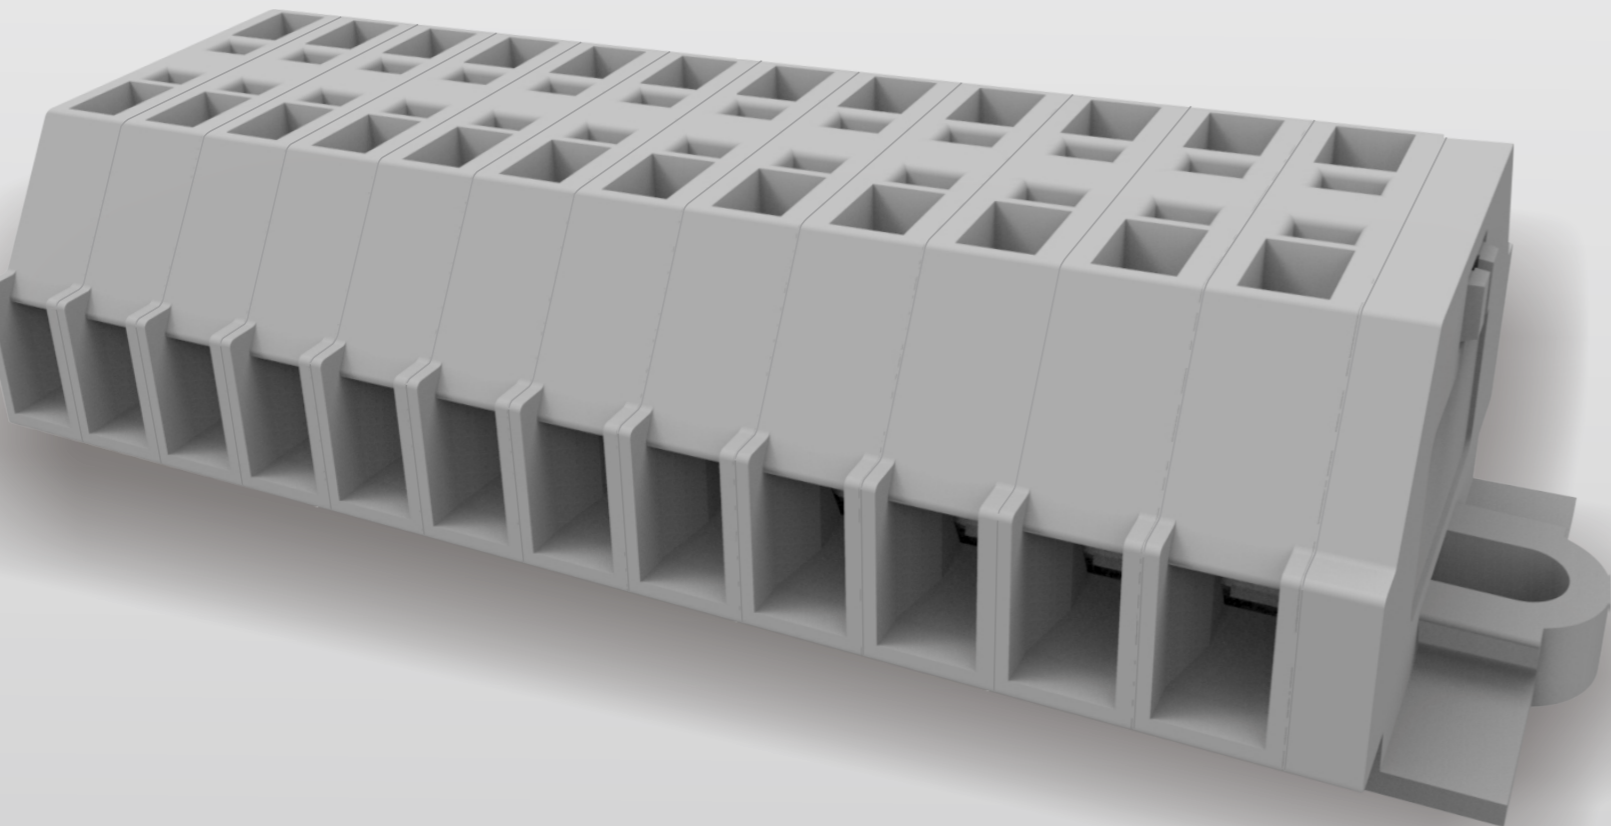

GWS1.5


一进一出




技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	300	300	300	600
额定电流 Rated Current [A]	10	10	10	5
接线范围 Wire Range		28-16AWG		
技术参数 Technical Data		IEC		
额定电压 Rated Voltage [V]		400		
额定电流 Rated Current [A]		18		
单芯 Solid		0.2-1.5mm ²		
柔性导线 Flexible		0.2-1.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
剥线长度 Stripping Length		8-9		
认证 Approval				

GWS1.5J

一进一出




技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	300	300	300	600
额定电流 Rated Current [A]	10	10	10	5
接线范围 Wire Range		28-16AWG		
技术参数 Technical Data		IEC		
额定电压 Rated Voltage [V]		400		
额定电流 Rated Current [A]		18		
单芯 Solid		0.2-1.5mm ²		
柔性导线 Flexible		0.2-1.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
剥线长度 Stripping Length		8-9		
认证 Approval				


GWS1.5B


两进两出




技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]	300	300	300	600
额定电流 Rated Current [A]	10	10	10	5
接线范围 Wire Range		28-16AWG		
技术参数 Technical Data		IEC		
额定电压 Rated Voltage [V]		400		
额定电流 Rated Current [A]		18		
单芯 Solid		0.2-1.5mm ²		
柔性导线 Flexible		0.2-1.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
剥线长度 Stripping Length		8-9		
认证 Approval				


GWS1.5BJ
两进两出

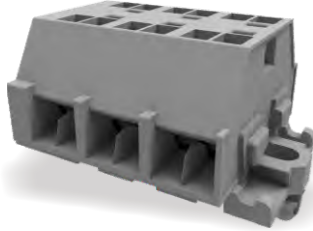


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		10	10	5
接线范围 Wire Range		28-16AWG		
技术参数 Technical Data		IEC		
额定电压 Rated Voltage [V]		400		
额定电流 Rated Current [A]		18		
单芯 Solid		0.2-1.5mm ²		
柔性导线 Flexible		0.2-1.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.0mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
剥线长度 Stripping Length		8-9		
认证 Approval				


GWS2.5B
两进两出

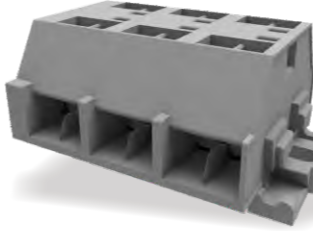


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		15	15	5
接线范围 Wire Range		28-14AWG		
技术参数 Technical Data		IEC		
额定电压 Rated Voltage [V]		500		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-2.5mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
剥线长度 Stripping Length		8-9		
认证 Approval				


GWS2.5
一进一出

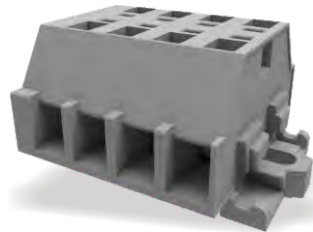


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		15	15	5
接线范围 Wire Range		28-14AWG		
技术参数 Technical Data		IEC		
额定电压 Rated Voltage [V]		500		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-2.5mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
剥线长度 Stripping Length		8-9		
认证 Approval				


GWS2.5BJ
两进两出

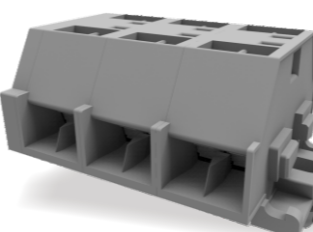


技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		15	15	5
接线范围 Wire Range		28-14AWG		
技术参数 Technical Data		IEC		
额定电压 Rated Voltage [V]		500		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-2.5mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
剥线长度 Stripping Length		8-9		
认证 Approval				


GWS2.5J
一进一出

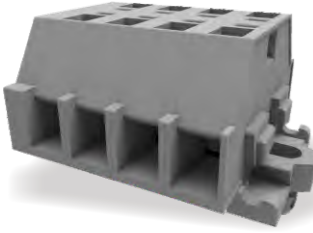



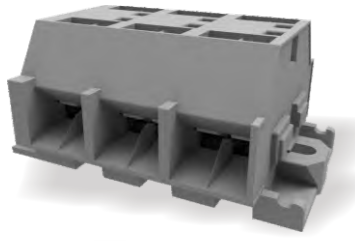

技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		15	15	5
接线范围 Wire Range		28-14AWG		
技术参数 Technical Data		IEC		
额定电压 Rated Voltage [V]		500		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-2.5mm ²		
柔性导线 Flexible		0.2-2.5mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-1.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		6KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
剥线长度 Stripping Length		8-9		
认证 Approval				



GWS4
一进一出

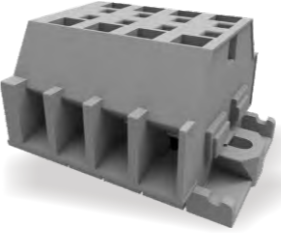

技术参数 Technical Data		UL (1059)		
等级 Use Group		B	C	D
额定电压 Rated Voltage [V]		300	300	600
额定电流 Rated Current [A]		20	20	5
接线范围 Wire Range		28-12AWG		
技术参数 Technical Data		IEC		
额定电压 Rated Voltage [V]		630		
额定电流 Rated Current [A]		24		
单芯 Solid		0.2-4.0mm ²		
柔性导线 Flexible		0.2-4.0mm ²		
柔性导线带冷压头 Flexible with ferrule		0.2-2.5mm ²		
过电压类别 Overvoltage Category		III		
污染等级 Degree of pollution		3		
额定冲击电压 Impulse withstand voltage		8KV		
材料 Material				
绝缘材料 Insulation Material		PA66		
阻燃等级 Flammability rating		UL94V-0		
导体材料 Contactor Material		Copper alloy		
导体表面镀层 Contactive Coating		Sn Plated		
一般参数 Other Data				
剥线长度 Stripping Length		9-10		
认证 Approval				
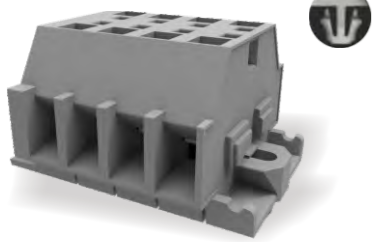
<p>GWS4J 一进一出</p> 	技术参数	Technical Data	UL (1059)		
	等级	Use Group	B	C	D
	额定电压	Rated Voltage [V]	300	300	600
	额定电流	Rated Current [A]	20	20	5
	接线范围	Wire Range	28-12AWG		
	技术参数	Technical Data	IEC		
	额定电压	Rated Voltage [V]	630		
	额定电流	Rated Current [A]	24		
	单芯	Solid	0.2-4.0mm ²		
	柔性导线	Flexible	0.2-4.0mm ²		
	柔性导线带冷压头	Flexible with ferrule	0.2-2.5mm ²		
	过电压类别	Overvoltage Category	III		
	污染等级	Degree of pollution	3		
	额定冲击电压	Impulse withstand voltage	8KV		
	材料	Material			
	绝缘材料	Insulation Material	PA66		
	阻燃等级	Flammability rating	UL94V-0		
导体材料	Contacting Material	Copper alloy			
导体表面镀层	Contactive Coating	Sn Plated			
一般参数	Other Data				
剥线长度	Stripping Length	9-10			
认证	Approval				

<p>GWS4B 两进两出</p> 	技术参数	Technical Data	UL (1059)		
	等级	Use Group	B	C	D
	额定电压	Rated Voltage [V]	300	300	600
	额定电流	Rated Current [A]	20	20	5
	接线范围	Wire Range	28-12AWG		
	技术参数	Technical Data	IEC		
	额定电压	Rated Voltage [V]	630		
	额定电流	Rated Current [A]	32		
	单芯	Solid	0.2-4.0mm ²		
	柔性导线	Flexible	0.2-4.0mm ²		
	柔性导线带冷压头	Flexible with ferrule	0.2-2.5mm ²		
	过电压类别	Overvoltage Category	III		
	污染等级	Degree of pollution	3		
	额定冲击电压	Impulse withstand voltage	8KV		
	材料	Material			
	绝缘材料	Insulation Material	PA66		
	阻燃等级	Flammability rating	UL94V-0		
导体材料	Contacting Material	Copper alloy			
导体表面镀层	Contactive Coating	Sn Plated			
一般参数	Other Data				
剥线长度	Stripping Length	9-10			
认证	Approval				
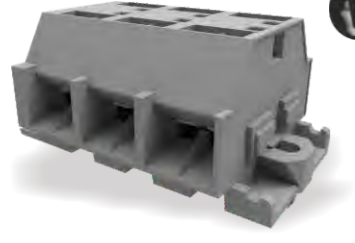
<p>GWS4BJ 两进两出</p> 	技术参数	Technical Data	UL (1059)		
	等级	Use Group	B	C	D
	额定电压	Rated Voltage [V]	300	300	600
	额定电流	Rated Current [A]	20	20	5
	接线范围	Wire Range	28-12AWG		
	技术参数	Technical Data	IEC		
	额定电压	Rated Voltage [V]	630		
	额定电流	Rated Current [A]	32		
	单芯	Solid	0.2-4.0mm ²		
	柔性导线	Flexible	0.2-4.0mm ²		
	柔性导线带冷压头	Flexible with ferrule	0.2-2.5mm ²		
	过电压类别	Overvoltage Category	III		
	污染等级	Degree of pollution	3		
	额定冲击电压	Impulse withstand voltage	8KV		
	材料	Material			
	绝缘材料	Insulation Material	PA66		
	阻燃等级	Flammability rating	UL94V-0		
导体材料	Contacting Material	Copper alloy			
导体表面镀层	Contactive Coating	Sn Plated			
一般参数	Other Data				
剥线长度	Stripping Length	9-10			
认证	Approval				

圆铜导线的标准截面积及拉力 (IEC/EN60947)

ISO公制尺寸 (mm ²)	AWG/kcmil 制尺寸与标准截面积的对对应关系		拉力 (N)
	AWG/kcmil 制尺寸	等效的公制截面积 (mm ²)	
0.2	24	0.205	10
0.34	22	0.324	15
0.5	20	0.519	20
0.75	18	0.82	30
1	-	-	35
1.5	16	1.3	40
2.5	14	2.1	50
4	12	3.3	60
6	10	5.3	80
10	8	8.4	90
16	6	13.3	100
25	4	21.2	135
35	2	33.6	190
50	0	53.5	236
70	00	67.4	285
95	000	85	351

圆铜导体弯曲试验数值 (IEC/EN60947)

导体截面		衬套孔直径 mm	高度 mm	砝码质量 kg
mm ²	AWG/kcmil			
0.2	24	6.5	260	0.2
0.34	22	6.5	260	0.2
0.5	20	6.5	260	0.3
0.75	18	6.5	260	0.4
1.0	-	6.5	260	0.4
1.5	16	6.5	260	0.4
2.5	14	9.5	280	0.7
4.0	12	9.5	280	0.9
6.0	10	9.5	280	1.4
10	8	9.5	280	2.0
16	6	13	300	2.9
25	4	13	300	4.5
-	3	14.5	320	5.9
35	2	14.5	320	6.8
-	1	15.9	343	8.6
50	0	15.9	343	9.5

注：IEC60947标准规定连续旋转135圈

验证螺纹型端子机械强度的拧紧力矩 (IEC/EN60947)

螺纹直径 (mm)		拧紧力矩 (N·m)		
米制标准值	直径范围	I	II	III
1.6	∅≤1.6	0.05	0.1	0.1
2.0	1.6<∅≤2.0	0.1	0.2	0.2
2.5	2.0<∅≤2.8	0.2	0.4	0.4
3.0	2.8<∅≤3.0	0.25	0.5	0.5
-	3.0<∅≤3.2	0.3	0.6	0.6
3.5	3.2<∅≤3.6	0.4	0.8	0.8
4	3.6<∅≤4.1	0.7	1.2	1.2
4.5	4.1<∅≤4.7	0.8	1.8	1.8
5	4.7<∅≤5.3	0.8	2.0	2.0
6	5.3<∅≤6.0	1.2	2.5	3.0
8	6.0<∅≤8.0	2.5	3.5	6.0
10	8.0<∅≤10.0	-	4.0	10.0
12	10<∅≤12	-	-	14.0
14	12<∅≤15	-	-	19.0
16	15<∅≤20	-	-	25.0
20	20<∅≤24	-	-	36.0
24	24<∅	-	-	50.0

第 I 列：适用于拧紧时不突出孔外的无头螺钉和不能用刀口宽度大于螺钉根部直径的螺丝刀拧紧的其他螺钉。
 第 II 列：适用于用螺丝刀拧紧的螺钉和螺母。
 第 III 列：适用于不可用螺丝刀来拧紧的螺钉和螺母。

温升试验、老化试验、电压降试验时的试验电流值 (IEC/EN60947)

公制尺寸导线		AWG/kcmil 尺寸导线	
额定截面积 (mm ²)	试验电流 (A)	额定截面积 AWG/kcmil	试验电流 (A)
0.2	4	24	4
0.34	5	22	6
0.5	6	20	8
0.75	9	18	10
1	13.5	16	16
1.5	17.5	14	22
2.5	24	12	29
4	32	10	38
6	41	8	50
10	57	6	67
16	76	4	90
25	101	2	121
35	125	1	139
50	150	0	162
70	192	00	185
95	232	000	217
120	269	0000	242
150	309	250kcmil	271
185	353	300kcmil	309
240	415	350kcmil	353
300	520	500kcmil	415
-	-	600kcmil	520

与额定绝缘电压对应的介电试验电压 (IEC/EN60947)

额定绝缘电压 U_i V	交流试验电压 V	直流试验电压 V
$U_i \leq 60$	1000	1415
$60 < U_i \leq 300$	1500	2120
$300 < U_i \leq 690$	1890	2670
$690 < U_i \leq 800$	2000	2830
$800 < U_i \leq 1000$	2200	3110
$1000 < U_i \leq 1500$	-	3820

最小爬电距离 (IEC/EN60947)

电器的额定绝缘电压或工作电压, 交流有效值或直流 V	电器承受长期应力的最小爬电距离							
	污染等级							
	1	2			3			
	材料组别							
	全部 mm	I mm	II mm	III mm	I mm	II mm	IIIa mm	IIIb mm
10	0.08	0.4	0.4	0.4	1	1	1	
12.5	0.09	0.42	0.42	0.42	1.05	1.05	1.05	
16	0.1	0.45	0.45	0.45	1.1	1.1	1.1	
20	0.11	0.48	0.48	0.48	1.2	1.2	1.2	
25	0.125	0.5	0.5	0.5	1.25	1.25	1.25	
32	0.14	0.53	0.53	0.53	1.3	1.3	1.3	
40	0.16	0.56	0.8	1.1	1.4	1.6	1.8	
50	0.18	0.6	0.85	1.2	1.5	1.7	1.9	
63	0.2	0.63	0.9	1.25	1.6	1.8	2	
80	0.22	0.67	0.95	1.3	1.7	1.9	2.1	
100	0.25	0.71	1	1.4	1.8	2	2.2	
125	0.28	0.75	1.05	1.5	1.9	2.1	2.4	
160	0.32	0.8	1.1	1.6	2	2.2	2.5	
200	0.42	1	1.4	2	2.5	2.8	3.2	
250	0.56	1.25	1.8	2.5	3.2	3.6	4	
320	0.75	1.6	2.2	3.2	4	4.5	5	
400	1	2	2.8	4	5	5.6	6.3	
500	1.3	2.5	3.6	5	6.3	7.1	8	
630	1.8	3.2	4.5	6.3	8	9	10	
800	2.4	4	5.6	8	10	11	12.5	-
1000	3.2	5	7.1	10	12.5	14	16	-
1250	4.2	6.3	9	12.5	16	18	20	-
1600	5.6	8	11	16	20	22	25	-